

C5/C6 FIRE EXTINGUISHER MOUNT

The Brey-Krause R-2115 Fire Extinguisher Mount has been designed to bolt in without modification and provide a mounting point for an Amerex brand 2.5 lb. fire extinguisher w/mounting bracket. The R-2115 mounting bracket does limit some forward seat motion.

Step 1.

Move seat forward seat rearward. Remove plastic escutcheons that cover the front seat track to floor mounting nuts.


Step 2.

Position extinguisher mount over seat track mounting studs with the mounting plate facing forward.

Step 3.

Use supplied nuts to fasten mount to seat track-mounting studs. (Loctite is recommended.)


Fig. 3.

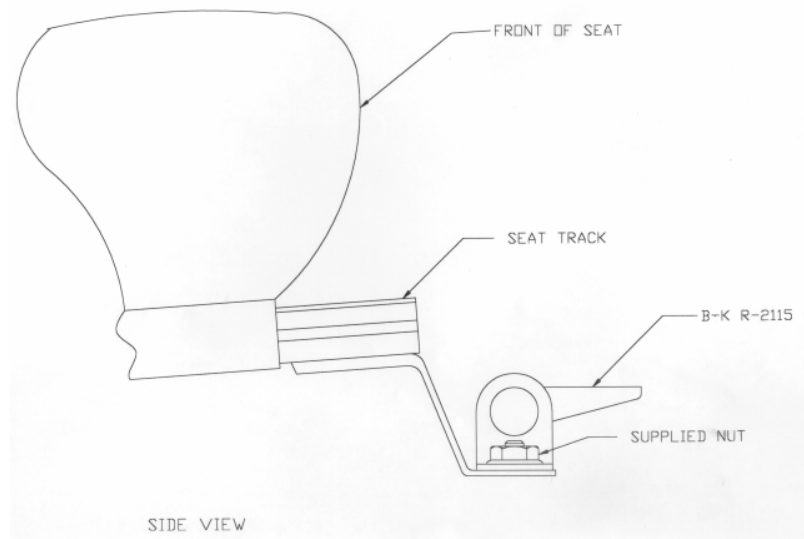

Step 4.

If you are installing mount on a power seat you must install the supplied power seat stop. See Fig. 2. If you have a memory seat and you have a position that will move the seat beyond the stop, remove it from memory before attaching the stop and the fire extinguisher.

Fig. 2.

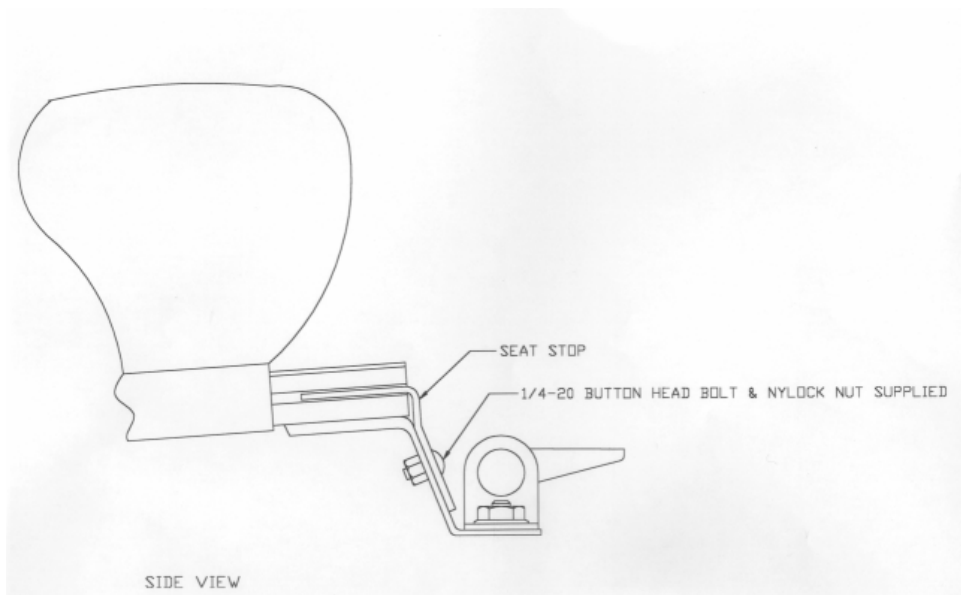

Step 5.

Attach Amerex mounting bracket to the R-2115 mounting plate with supplied hardware. (4 - 10-24 x 3/8 pan head screws and 4 - 10-24 nylock nuts.

Step 6.

Finished installation should look like this.



Performance driving events are by nature potentially hazardous to your health. Brey-Krause Mfg. Co. Inc. shall not be liable for injury, consequential, or other types of damages resulting from the use or misuse of our products. Proper installation of these parts is critical and should only be done by a professional shop.