

## R-9010

# VIDEO CAMERA MOUNT INSTALLATION INSTRUCTIONS

This camera mount has been designed to mount a small, lightweight video camera to any Brey-Krause harness guide bar. Before installing the mount to the harness guide bar, attach your camera to the mount and check for a proper fit.

### Step 1.

Mount camera using tee bolt- (A) supplied. Carefully screw tee bolt- (A) into the camera-mounting lug. Make sure the thread engagement is sufficient. If not remove tee bolt- (A), retaining clip-(C) and then remove (1) spacer- (D) under the head of tee bolt- (A). Reinstall the retaining clip.

### Step 2.

Install retaining strap supplied. Cut to length if necessary.

### Step 3.

Attach the camera mount to bar via clamp block- (E). Snug clamp bolts at this time.


### Step 4.

Aim camera. Adjust height and pan via L-handle- (F). Adjust tilt via the bar clamp.

R-9012 Adapter piece is also available for use with model R-1025 911 harness truss.

Performance driving events are by nature potentially hazardous to your health. Brey-Krause Mfg. Co. Inc. shall not be liable for injury, consequential, or other types of damages resulting from the use or misuse of our products. Proper installation of these parts is critical and should only be done by a professional shop.

## CAMERA MOUNT R-9010

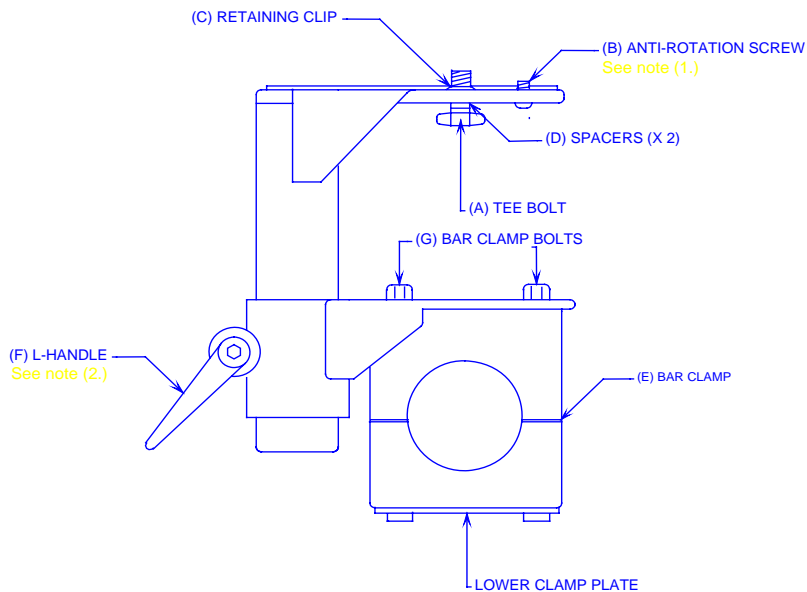

### Notes:

- 1.) Most video cameras have a provision for screw- (B), which is used to keep the camera from rotating. It can be removed if necessary.
- 2.) Pull out L-handle- (F) and rotate to index.