

VIDEO CAMERA MOUNT FOR BOXSTER FACTORY ROLL BAR

INSTALLATION INSTRUCTIONS

This camera mount has been designed to mount a small, lightweight video camera to a Boxster factory roll bar.

Step 1

Separate upper portion of the camera mount (stainless steel) from the lower portion (aluminum). This eases installation.

Step 2.

Remove the center portion of the factory roll bar padding. This is done by carefully prying it off as shown below. (Tip: A screwdriver wrapped with duct tape or electrical tape will help prevent scratching the bar.) Note: Unbuckle cargo bag from its clip before removing pad if vehicle is so equipped.



Step3.

Disassemble the lower portion of the camera mount. Position delrin inserts onto the roll bar and place U-strap over them as shown.



Step 4.

Reassemble lower portion as shown. Only finger tighten nuts to allow rotation of the mount. Note: If rotating the mount is difficult try holding the delrin insert while rotating the mount.



Step 5.

Slide upper portion of mount into lower portion as shown,

Note the convertible top can be lowered or raised with the mount installed but depending on the size of your camera it may interfere with the top. You can position the upper portion of the mount two ways which may help compensate for a large camera. **Carefully test top operation for interference!**




Step 6.

Mount camera to upper portion of mount using tee bolt- (A) supplied. Carefully screw tee bolt- (A) into the camera-mounting lug. Make sure the thread engagement is sufficient. If not remove tee bolt- (A), retaining clip-(C) and then remove (1) spacer- (D) under the head of tee bolt- (A). Reinstall the retaining clip.

Step 7.

Install retaining strap supplied. Cut to length if necessary.

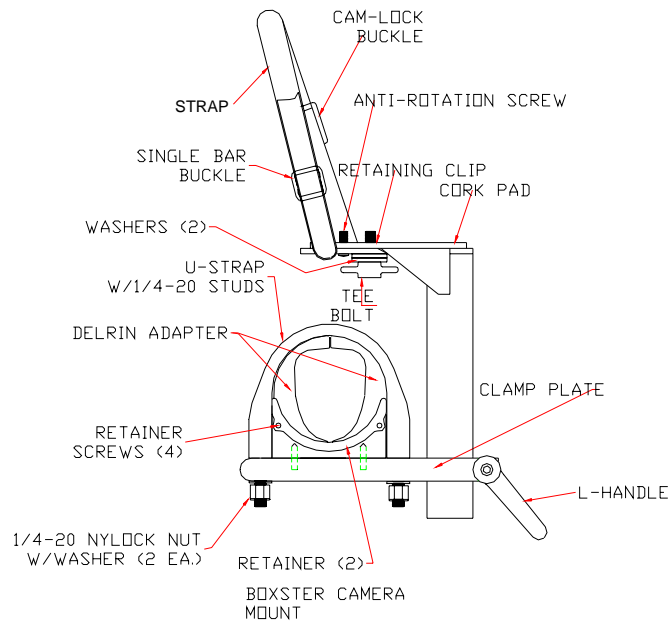

Step 8

Aim camera. Adjust height and pan via L-handle. Adjust tilt via the bar clamp.

Performance driving events are by nature potentially hazardous to your health. Brey-Krause Mfg. Co. Inc. shall not be liable for injury, consequential, or other types of damages resulting from the use or misuse of our products. Proper installation of these parts is critical and should only be done by a professional shop.

- Notes: 1.) Most video cameras have a provision for screw- (B), which is used to keep the camera from rotating. It can be removed if necessary.
2.) Pull out L-handle- (F) and rotate to index.