

***Brey-Krause Model R-9014– ADJUSTABLE CAMERA MOUNT
For Brey-Krause R-1035 Harness Truss***



This kit allows a small, lightweight video camera to be mounted to the Brey-Krause R-1035 harness truss for the Porsche 996. The original Brey-Krause camera mount has been redesigned specifically for this unique harness mount. The mount is 3-axis adjustable and features quick-release handles for easy positioning. It features a nylon retaining strap and cork base to protect the camera, along with sturdy aluminum and stainless steel construction.

This part is intended only for use with the Brey-Krause R-1035 harness truss

Proper installation of this product is critical to its functionality and should only be done by a professional shop. Driving in a racing environment is inherently dangerous. Brey-Krause Manufacturing shall not be held responsible for injury, death, vehicle damage or other damage resulting from the use or misuse of our products.

Kit Contents

- Camera mount (1)
- Replacement 10-24 nylock nuts (2)


Additional Required Items

- Brey-Krause R-1035 harness truss
- Small video camera

INSTALLATION INSTRUCTIONS

Step 1

Locate the two $\frac{1}{4}$ " shoulder bolts in the middle of the truss. Remove these bolts as well as the corresponding spacers in the truss.

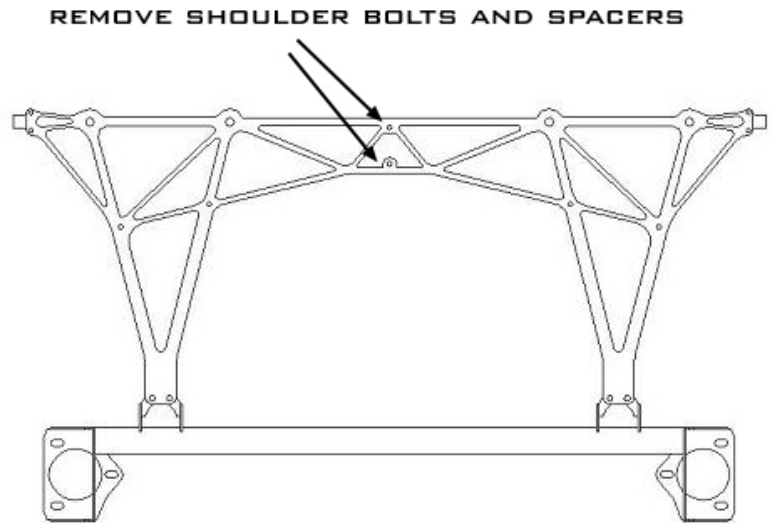

Step 2

Position the camera mount as shown. The aluminum mounting bracket will take the place of the spacers that have been removed. Re-install the shoulder bolts and washers, but not the nuts. Install the new nylock nuts supplied with the camera mount.



Step 3

Mount camera to the camera mount. Carefully screw the supplied T-bolt into the camera mount lug. Check that the thread has sufficient engagement into the camera. If it is too short, remove the retaining clip and T-bolt, and re-install them without one of the spacers that sit between the T-bolt and camera mount. Secure the camera with the supplied strap.

It is critical that you ensure the camera is secure on the mount, as it can otherwise become a projectile if the car is involved in an impact!

Step 4

Ensure that all fasteners are tight. The camera mount is adjustable in pitch, pan and height. The quick-release handles are of the ratcheting type. Turn the handle, then pull it out and return it to its initial position. Now hit the track! (But behave yourself – the camera is rolling...)

